


# 易光网络解决方案 架构展示区


Reyee E-Lighten Optical Solution Architecture

## 核心机房 / Core Equipment Room

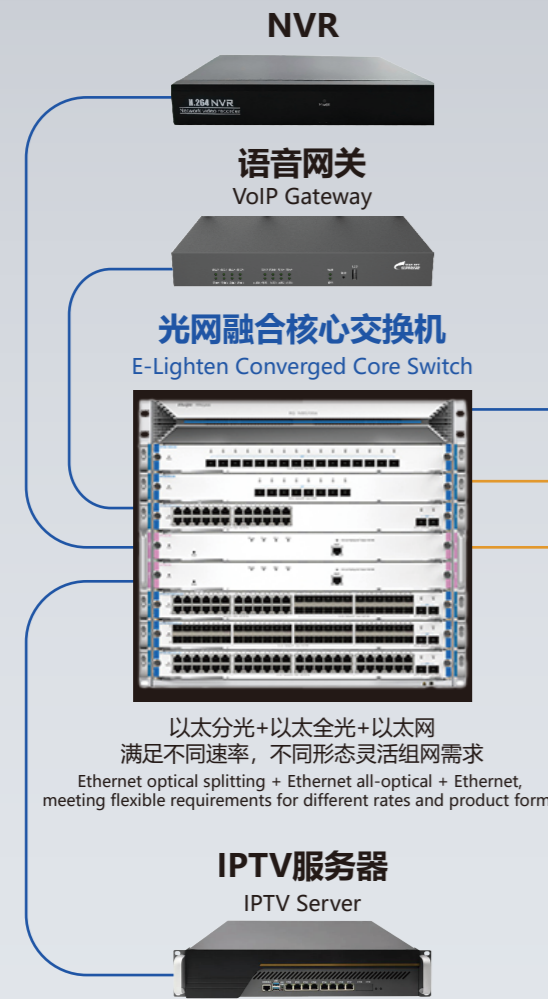

## 骨干光缆 Backbone Optical Cable

## 楼层弱电 / Floor ELV Room



以太网  
Ethernet

**1:32**  
水平布线数量节约60%  
1:32 horizontal cabling, saving 60% of cabling.



## 桥架 Cable Tray

## 楼道走廊 / Corridor



灵活适配全光/分光  
1G/2.5G/10G模块，满足后续平滑升级，降低成本  
Flexible adaptation to all-optical/optical splitting/1G/2.5G/10G modules, meeting smooth upgrade and cost reduction requirements.




动态负载均衡(DBA)技术  
满足突发流量的优先分配  
让网络更聪明，利用率更高  
Dynamic bandwidth allocation (DBA) ensures the prioritized allocation of burst traffic, making the network smarter and more efficient.

可连接32台设备  
Up to 32 devices can be connected

类型多样 灵活选择  
Diverse switch types for flexible selection

最远300M  
Up to 300 m

## 接入室内 / Indoor Access



一芯入户 4口输出  
One fiber in, four ports out

满足客户不同需求  
Multi-scenario deployment to meet diverse customer needs

